


LC Uniboot Fibre Patch Cord

DESCRIPTION

OPTiLite DCS's LC uniboot high-performance patch cords are a cutting-edge solution for modern fiber optic networks. They deliver exceptional performance, improved airflow, and superior cable management. The innovative uniboot connector design, combined with round duplex LSZH, plenum, or riser cables, reduces cable management efforts by up to 70% compared to traditional patch cord solutions. Available in various CPR-certified cable grades, these patch cords ensure superior performance, compliance with fire safety standards, and reliable connectivity for demanding applications.

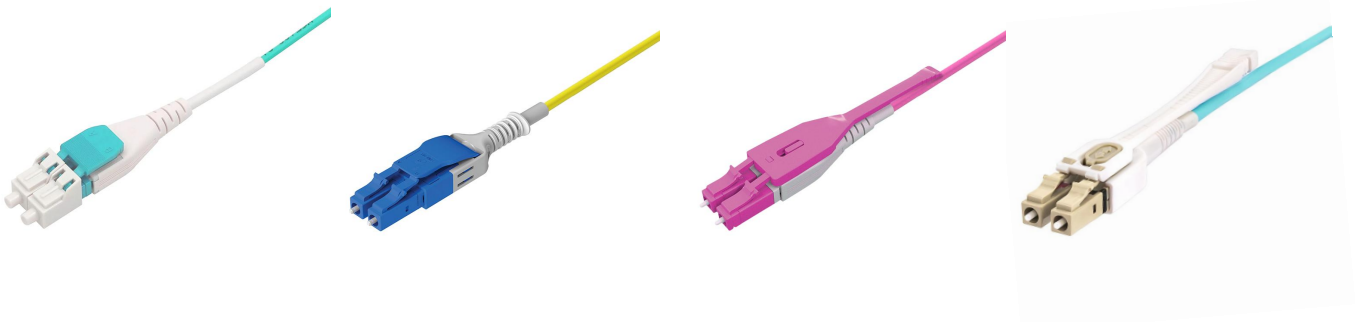

FEATURES

- Comply with IEC, EIA-TIA, and telcordia performance requirements
- All components are machine polished, providing the highest quality
- Available in custom length and fibreglass
- Various types of LC uniboot connectors are available
- All components are factory tested and come with a test certificate
- With an easy, non-jig revers

APPLICATIONS

- Data Centers
- Telecommunications
- Enterprise Networks
- FTTH (Fibre to the Home)
- CATV (Cable Television)
- Medical and Industrial Applications

SPECIFICATIONS

Item	Parameters			
Type	Singlemode		Multimode	
	Multimode	Premium	Standard	Premium
Max Insertion Loss	0.30dB	0.25dB	0.30dB	0.25dB
Typical Return Loss	≥50dB(UPC);≥60dB(APC)		≥30dB	
Connector	Switchable connector /Switchable connector with push-pull tab			
Cable Jacket	PVC/LSZH/OFNP			
Cable Diameter	2.0mm/3.0mm			
Fibre Type	OS1/OS2/OM1/OM2/OM3/OM4/OM5			
Temperature Range	-40~+75°			

ORDER INFORMATION

Description	Reference
LC-LC uniboot 2.0mm LSZH OS2 Yellow	UB2YL
LC-LC uniboot 2.0mm LSZH OM3 Aqua	UB3AQ
LC-LC uniboot 2.0mm LSZH OM4 Aqua	UB4AQ
LC-LC uniboot 2.0mm LSZH OM4 Violet	UB4VT
LC-LC uniboot with pull tab 2.0mm LSZH OS2 Yellow	UBP2YL
LC-LC uniboot with pull tab 2.0mm LSZH OM3 Aqua	UBP3AQ
LC-LC uniboot with pull tab 2.0mm LSZH OM4 Aqua	UBP4AQ
LC-LC uniboot with pull tab 2.0mm LSZH OM4 Violet	UBP4VT